

Funis - wall

Aquasensor


- Wall mounting. The main components including the batteries are mounted within a control box for assembly underneath the wash basin.
- Fixed water-temperature. Pre-mixed or only cold water.
- For correct adjustment of the water flow, the supply pipes should be connected to an angle stopper tap (not included).
- Flexible connection hose with 1/2" swivel included.
- Operates 6 years on 4 Alkaline AA batteries at 100 cycles on average per day (included). Also available with trafo for mains connection.



HANDSFREE SENSOR FAUCETS
www.aquasensor.eu



Stylish design aerator.
Indestructible.
Intelligent electronics with self-setting detection zone.

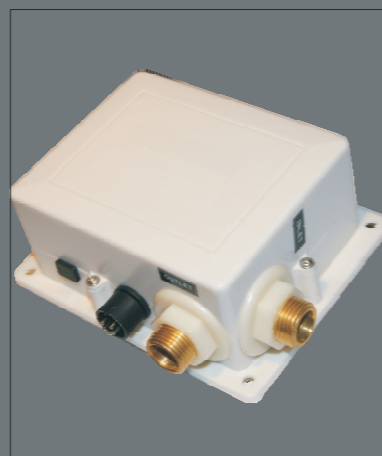

Main components within the control box for assembly underneath the wash basin. Also provided with battery compartment or trafo. Dimensions b x h x d: 150 x 120 x 63 mm

